

AS SAFE SECURITY SERVICES PTY LTD

Fact 2, 8 Freeman St, Campbellfield, Vic, 3061.
PO Box 422, Wallan, Vic, 3756.

Tel: (03) 9357 0112
Fax: (03) 9357 7212


LORD
SAFE CO.

Gold Series

home office retail medical cash management ransom protection firearms

Map of Australia

Email: info@esafes.com.au
Web: www.esafes.com.au




AS SAFE SECURITY SERVICES PTY LTD

Fact 2, 8 Freeman St, Campbellfield, Vic, 3061.
PO Box 422, Wallan, Vic, 3756.

Tel: (03) 9357 0112
Fax: (03) 9357 7212



Gold Series

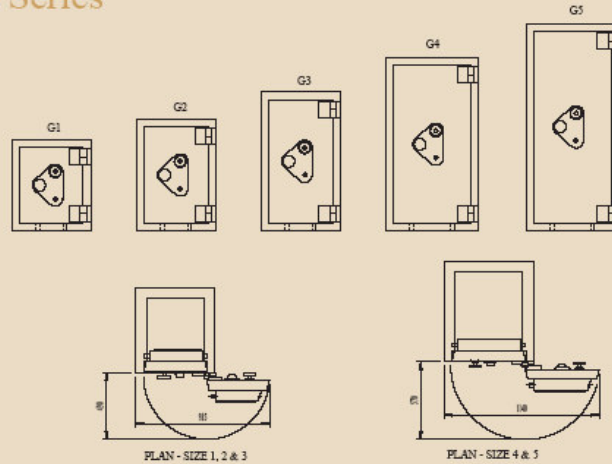

MODEL	EXTERNAL DIMENSIONS(mm)			INTERNAL DIMENSIONS(mm)			CAPACITY LITRES	MASS Kg	LOCKING POINTS	SHELVES	FLOOR LOADING
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH					
G1	666	581	611	506	421	383	80	460	8	2	12.6
G2	816	581	611	656	421	383	100	500	10	2	13.7
G3	1016	581	611	856	421	383	135	590	12	2	16.1
G4	1266	655	738	1106	495	510	280	900	12	3	18.1
G5	1516	655	738	1356	495	510	340	1060	18	3	21.3

BODY -

The press formed body linings are arc welded to form a 80mm thick body within which is poured a high strength refractory material.

DOOR -

Thickness 165mm incorporating a 75mm thick barrier of high density refractory material with additional 'millhard' drill protection.

BOLTWORK -

A two-way boltwork system secures the door to the body with 25mm diameter bolts.

LOCKING -

Standard locking is a three wheel combination lock and high security keylock. A digital electronic lock can be fitted in lieu of the combination lock.

SECONDARY LOCKING SYSTEM -

The safe is fitted with a glass activated reloading system that will secure the boltwork independently of the principal locking system if triggered by an attack.

ANCHORING -

Safe can be bolted to the floor via the 2 bolt down holes in the base of the safe.

INTERNAL FITTINGS -

Adjustable shelves are supplied with each safe. Cupboards and drawers are available.

FINISH -

Stainless steel fascia and satin chrome lock furniture compliment the quality Burgundy enamel finish.

Distributed by:

In line with our policy to provide the best in security, we reserve the right to incorporate any improvements or alter any part of the specification without prior notice.