

AS SAFE SECURITY SERVICES PTY LTD

Fact 2, 8 Freeman St, Campbellfield, Vic, 3061.
PO Box 422, Wallan, Vic, 3756.


Tel: (03) 9357 0112
Fax: (03) 9357 7212

LORD
SAFE CO.

Underfloor Safes

home office retail medical cash management record protection firearms



Email: info@esafes.com.au
Web: www.esafes.com.au




AS SAFE SECURITY SERVICES PTY LTD

Fact 2, 8 Freeman St, Campbellfield, Vic, 3061.
PO Box 422, Wallan, Vic, 3756.

Tel: (03) 9357 0112
Fax: (03) 9357 7212

Underfloor Safes

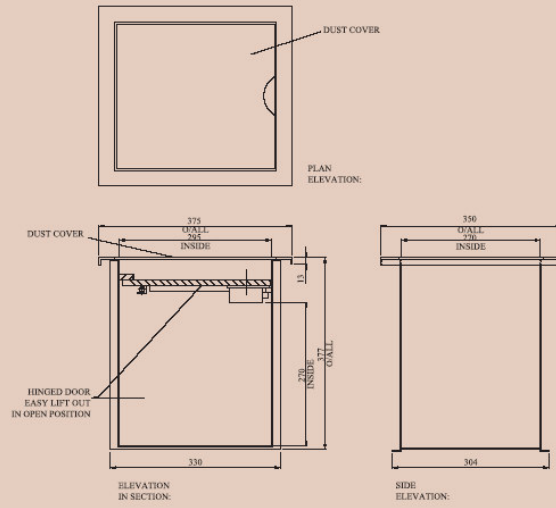

MODEL	EXTERNAL(mm)			INTERNAL(mm)			CAPACITY	MASS
	HEIGHT	WIDTH	DEPTH	HEIGHT	WIDTH	DEPTH	LITRES	Kg
NUGGET	375	375	350	270	295	270	20	23
APACHE	264	294	294	225	230	230	12	10.5

BODY -
Nugget is fabricated from 3mm and the Apache from 2mm mild steel plate, which is fully welded.

DOOR -
12mm thick steel slab with hardened plate and emergency relocker protecting the locking system. Apache has a thickness of 5mm steel plate. Nugget "Plus" 12mm thick door is oxyacetylene and drill resistant.

LOCKING -
The Nugget has 3 Locking options: Digital electronic lock, three wheel combination lock, or six lever high security key lock. The Apache is fitted with a six lever key lock only.

INSTALLATION -
The safe can be installed in concrete or timber floors. At least 150mm of strong mix concrete should be poured around the sides and bottom of the safe to come level with the top of the body. It is wise to add a waterproofing agent such as "Silasec" or "Yurite" to the concrete and to remove the door whilst setting. Detailed installation instructions are provided with the safe.

FINISH -
Nugget - Gunmetal Grey
Apache - Cloud Grey

Distributed by:

In line with our policy to provide the best in security, we reserve the right to incorporate any improvements or alter any part of the specification without prior notice.